




SUPERIOR UNDERFLOOR HEATING & COOLING SYSTEMS

Concorde House, Concorde Way, Segensworth North, Fareham, Hampshire PO15 5RL
 Tel: 01489 581787 Fax: 01489 576444

Email: sales@warmafloor.co.uk Web: www.warmafloor.co.uk

STANDARD MODULAR MANIFOLD

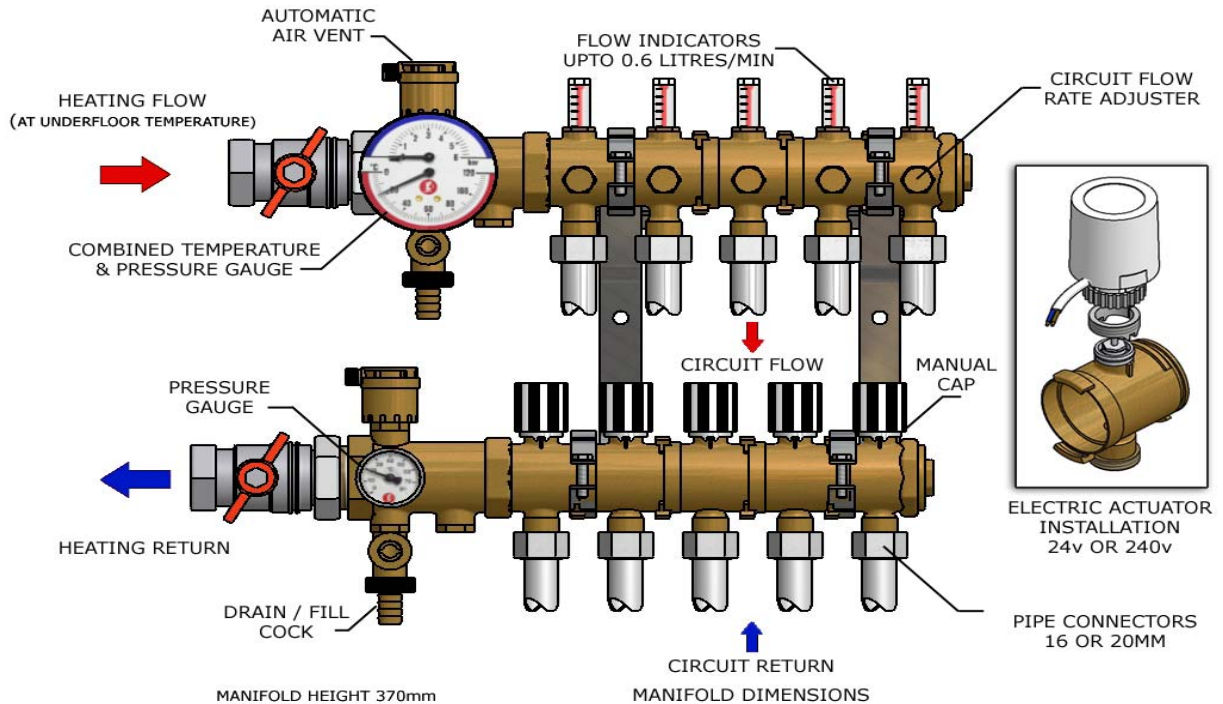

MANIFOLD HEIGHT 370mm
 MANIFOLD DEPTH 125mm

MANIFOLD DIMENSIONS

CIRCUITS
 MANIFOLD WIDTH

2	3	4	5	6	7	8	9	10	11	12
290mm	340mm	390mm	440mm	490mm	540mm	590mm	640mm	690mm	740mm	790mm

FITTING CLEARANCE
 MANIFOLD WIDTH 100mm , Height 250mm, Depth 175mm

MANIFOLDS SHOULD BE FIXED AT A HEIGHT 300mm FROM FINISHED FLOOR TO BOTTOM OF MANIFOLD
 ACCESS IS REQUIRED TO FRONT OF THE MANIFOLD FOR MAINTENANCE PURPOSES

STANDARD MODULAR MANIFOLDS

Warmafloor standard modular manifolds are used where the water supply temperature to the manifold is provided at the correct temperature and flow rate for the underfloor system.

The manifolds are manufactured in brass in a modular bayonet fit format. The manifold has a unique rapid fit assembly method providing high flexibility in achieving the correct number of outlets required. Additional circuits can be easily added and maintenance is simplified as components can be replaced individually. The manifolds are available with standard manual circuit control valves or these can be replaced with 24volt or 240volt electric actuators for automatic circuit control via a room thermostat or sensor.

Warmfloor standard modular manifolds are manufactured complete with all necessary gauges, valves, airvents and isolation valves with pipe connectors available to suit 16mm or 20mm pipework.

The fitted pressure gauge and flow and return thermometer makes checking the system operating parameters and fault finding very simple as readings can be easily taken at any time.